
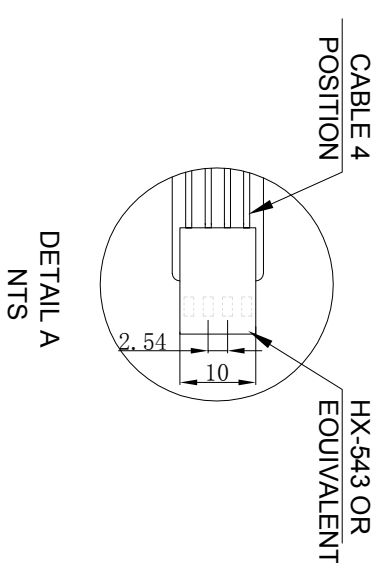


Logic:



- Notes:
1. Type: Film to Glass
 2. Operating Voltage: $\leq 10V$
 3. Operation Temperature: $20^{\circ}C \sim 65^{\circ}C$
 - Storage Temperature: $-30^{\circ}C \sim 70^{\circ}C$
 4. Life Time: 1,000,000 times
 5. Connect Material: FPC
 6. Response Time: $\leq 10ms$
 7. Linearity: $\leq 1.5\%$
 8. Transmittance: $\geq 75\%$
 9. Surface Hardness: $\geq 3H$ (pencil)
 10. Operation force: 60g ~ 150g
 11. Resistance: X: $450\Omega - 1100\Omega$ Y: $163\Omega - 400\Omega$

TOLERANCES
(UNLESS OTHERWISE STATED)

DECIMALS	ANGLES	$\pm 0.5\%$
$>2000MM$	$\pm 2.00MM$	
$1600 < X \leq 2000MM$	$\pm 1.20MM$	
$1200 < X \leq 1600MM$	$\pm 0.80MM$	
$800 < X \leq 1200MM$	$\pm 0.50MM$	
$400 < X \leq 800MM$	$\pm 0.30MM$	
$120 < X \leq 400MM$	$\pm 0.20MM$	
$30 < X \leq 120MM$	$\pm 0.10MM$	
$< 30MM$		

		GreenTouch Technology Co., Ltd	
Model No.:	GT-AW-Z2A-1	Size	22"
Structure	GHF	Unit	mm
Design	李俊	Date	2015.7.22
Check	付作市	Date	2015.7.22
Release	汪燕	Date	2015.7.22
Ratio	16:10	Scale	1:1
Page	1/1	Version	AO